

Plug into *The Current Future*

freedom
WON


Green Energy Solutions & Electric Mobility

Lithium Iron Phosphate (LiFePO4) Battery

SPF12-40(12.8V-40Ah)





Physical Dimension

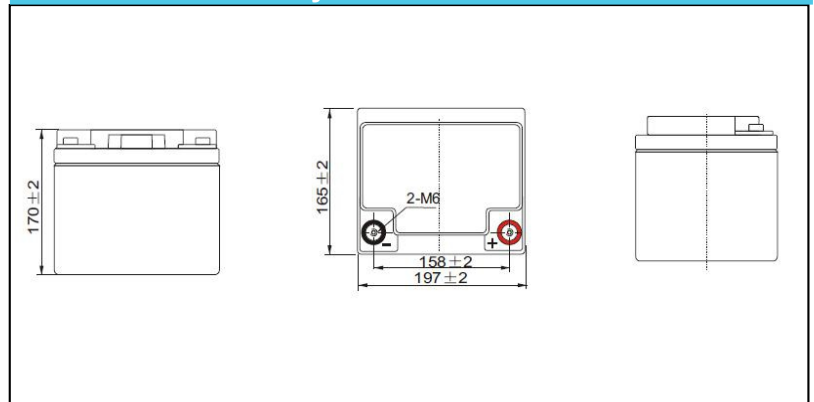

Specification:

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	40AH
	Energy	512Wh
	Internal Resistance	≤ 20mΩ
	Cycle life	>2000 cycles at 0.2C 100% DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% at 0.5C
	Efficiency of discharge	96~99% at 1C
Charge	Charge volt	14.6±/0.2V
	Charge Mode	CC at 0.2C to 14.6V, then at CV14.6V to charge current less than 0.02C
	Charge Current	9A
	Max. Charge current	20A
	Charge cut off voltage	15.6V±/0.2V
Discharge	Max. Continuous Current	40A
	Max. Pulse Current	80A (<3s)
	Discharge Cut-off Voltage	8V
Environment	Charge Temperature	0°C to 45°C (32F to 113F) at 60±25% Relative Humidity
	Discharge Temperature	- 20°C to 60°C (-4F to 140F) at 60±25% Relative Humidity
	Storage Temperature	0°C to 40°C (32F to 104F) 60±25% Relative Humidity
	Water Dust Resistance	IP56
Mechanical	Cell material	LiFePO4
	Plastic Case	ABS
	Dimensions (in./mm)	197*165*170mm
	Weight (lbs./kg.)	5.75 KG
	Terminal	M6
BMS	Protection function	Over charge protection, Over discharge protection, Over current protection, Short current protection, Balanced function, Temperature protection

Discharge Characteristic

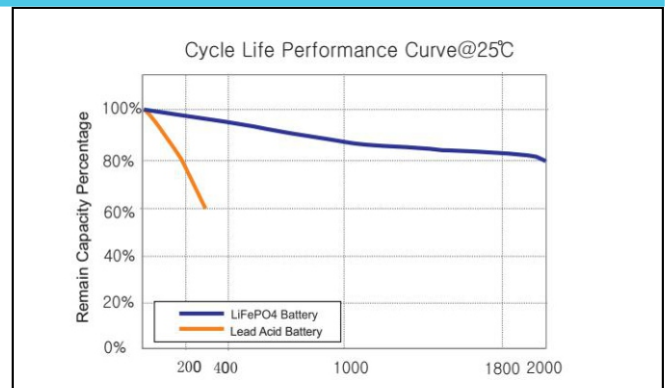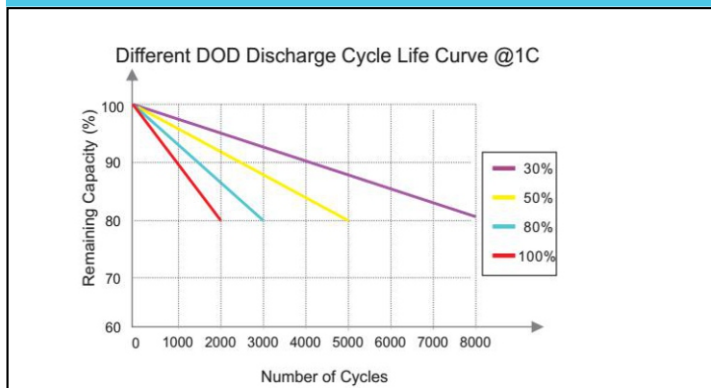

enquiries@freedomwon.co.za | +27(0)82 256 7430 | +27(0)83 280 6042
www.freedomwon.co.za